

FITEL® S179 Fusion Splicer

Hand-Held, Core Alignment Fusion Splicer



Features and Benefits

- Exceptional performance for fast and consistent fiber splicing
- Enhanced ease of use and portability
- High-speed splicing and heating¹
- Ruggedized body design
- Easy, intuitive splicer operation
- Compatible with Splice-On-Connectors (SOC)
- State-of-the-art communication methods

Overview

The FITEL S179 Hand-Held, Core Alignment Fusion Splicer offers powerful performance, delivering fast and reliable optical fiber splicing even under harsh environmental conditions. By combining speed, precision, durability, portability and state-of-the-art communication methods in one unit, this fusion splicing machine opens the door to an entirely new range of applications. The FITEL S179 Fusion Splicer is completely suitable for use with all Metro, LAN and FTTx fibers, including ultra bend-insensitive fibers.

Applications

- Fiber lasers
- Manufacture of optical parts
- FTTx
- LAN
- Backbone
- Enterprise
- Long-haul
- Data Centers

Product Description

Designed with users in mind, the FITEL S179 Fusion Splicer delivers rapid splicing and heating with consistent results, splice after splice. A large-capacity battery system helps save time by allowing 200 splicing cycles (splicing/heating) in one charge.² While a 4.3-inch wide LCD screen with touch panel offers easy and intuitive operation, a proportionately wide splicing chamber makes optical fiber easier to load than previous and comparable splicers. For improved visibility in low-light conditions, 3+1 LED lights illuminate the entire splicing chamber. A detachable, left-side V-groove makes cleaning and maintenance a breeze.

The S179 Fusion Splicer was also designed to meet the rigors of use in the field. While a substantially lower profile and lighter weight enhance portability, this splicer's canopy design and ruggedized body provide resistance to shock, water and dust exposure. A powerful, high propulsion motor (8N) helps ensure stable splicing of even the most rigid indoor and drop cables. Internal battery charging, embedded Near Field Communication (NFC) and Smartphone readiness combine with other features to make the S179 one of the most powerful and user-friendly fusion splicing machines available today.

¹ High-speed splicing (6 seconds on semi-auto mode) and fast heating (9 seconds at power mode)


² In semi-auto splicing mode and regular heating mode

New Features

- **Touch Screen:** 4.3-inch wide LCD screen
- **Illumination lamp:** 3 upper + 1 lower LED
- **Detachable V-groove:** Easy maintenance and lens cleaning
- **NFC:** Communication with Smartphone



Touch Screen



Illumination lamp
3+1 LED



Detachable V-groove
Easy Cleaning



NFC
Near Field Communication

Under Tough Environments

- **Shock Resistant:** Equivalent to IK07 rating Mechanical impact³
- **Drop Resistant:** 76 cm drop tests from 5 different angles⁴
- **Water Resistant:** Equivalent to IPX2 rating drip proof⁵
- **Dust Resistant:** Equivalent to IP5X rating dust proof⁶



Shock Resistant



Drop Resistant




Water Resistant



Dust Resistant

FITEL Splicer SOC partners

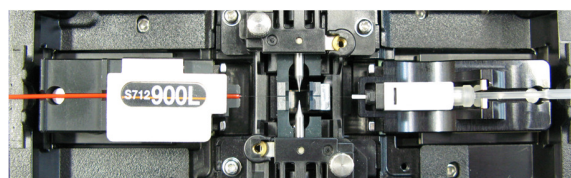

³ IK07 rating Mechanical impact means that the machine protects against 2 joule impact, it is equivalent to 500g force from 40cm. This does not guarantee that the machine will always be undamaged under these conditions.

⁴ Standard operations could be carried out after conducting the above tests. These tests were performed at the Furukawa Electric Co., Ltd. laboratories with no significant damage resulting. This does not guarantee that the machine will always be undamaged under these conditions.

⁵ IPX2 rating drip proof means that the machine can be exposed to 3 mm/min drips for 10 minutes with 15 degree tilt and still function.

⁶ IP5X rating dust proof means that the machine can be exposed to dust particles with a diameter of 0.1 µm to 25 µm and still function.

⁷ SEIKOH GIKEN is a registered trademark of SEIKOH GIKEN CO., LTD.

⁸ "DIAMOND" is a registered trademark of DIAMOND SA.

FITEL® S179 Fusion Splicer

Product Specifications

Applicable Fibers	SM (ITU-T G.652, G.657A1 and G.657A2), MM (ITU-T G.651), DSF (ITU-T G.653), NZD (ITU-T G.655), BIF/UBIF (Bend Insensitive Fiber ITU-T G.657B3)
Cladding Diameter	80 - 150 µm
Coating Diameter	100 - 3000 µm
Fiber Cleave Length	5 - 16 mm
Average Splice Loss	SM:0.02dB, MM:0.01dB, DSF:0.04dB, NZD:0.04dB
Splice Time	6 seconds (Semi-auto mode) 9 seconds (Regular mode)
Heat Time	9 (60mm, Tyco SMOUV1120-1, coating diameter 250-900µm, Power mode) ⁹ 13 (60mm, FITEL S921, coating diameter 250µm, Power mode) 15 (60mm, FITEL S921, coating diameter 900µm, Power mode)
Splice Programs	Max. 300
Automatic Splicing Selection	Available
Heat Programs	Max. 100
Automatic Heating Start	Available
Applicable Sleeves	20/40/60 mm
Fiber Holder	Tight holder (loose tube applicable) or Removable Fiber Holder System
Tension Test	1.96 N
Splice Return Loss	60 dB or more
Attenuation Splice Function	Intentional high splice loss of 0.1dB to 15dB(0.1dB step) can be made for an inline fixed attenuator
Fiber Image Magnification	278X, 556X
Splice Result Storage	20,000
Image Capture Capacity	Last 100 images to be automatically captured + up to 100 images to be stored permanently
Dimension	138W x 211D x 114H mm (not including shock absorber) 170W x 238D x 122H mm (including shock absorber)
Weight	1.6 kg (without battery), 1.9 kg (with battery)
Monitor	4.3" wide color LCD monitor with touch screen
Propulsion (motor)	8 N (designed value)
Data Output	USB ver. 2.0 mini B
Battery Capacity ¹⁰	Typical 200 splice/heat cycles, 120sec/cycle Typical 230 splice/heat cycles, 90sec/cycle
Altitude	5000 m
Wind Protection	15 m/s
Operating Temperature	-10 to + 50 °C (without excessive humidity)
Storage Temperature	-40 to +60 °C (without excessive humidity)
Humidity	0 to + 95% RH (non-condensing)
Power Source	AC Input 100 to 240V (50/60Hz), DC Input 11 to 24 V without any change of hardware

⁹ The heating time may vary depending on the type of sleeve. In addition, the first heating cycle after turning the power on can be longer than the standard heating time.

¹⁰ The number of splicing and heating cycles the machine can perform with a fully charged battery at 20 °C in semi-auto splicing mode and regular heating mode. The number of cycles may vary depending on the battery status and operating conditions.



Standard Package



Accessories



Tight Holders



Fiber Holders
for Loose Tube Fiber



Fiber holder Holders



SOC Holders

Standard Package

Item	P/N	Quantity			
		S179A-1	S179A-2	S179A-3	S179A-4
FITEL S179 Fusion Splicer	S179A	1	1	1	1
Hard Carrying Case	HCC-05	1	1	1	1
Spare Electrodes	ELR-01	1	1	1	1
AC Adapter	S979A	1	1	1	1
AC Power Cord	-	1	1	1	1
Cooling Tray	CTX-03	1	1	1	1
Electrode Sharpener	D5111	1	1	1	1
Cleaning Brush	VGC-01	1	1	1	1
Battery Pack	S947A	1	1	1	1
Tool Case	TCC-01	1	1	1	1
Instruction Manual	UMC-02	1	1	1	1
Quick Reference Guide	FTS-B526	1	1	1	1
16 mm Cleave Length Tight Holder	S712-T-016	1			
10 mm Cleave Length Tight Holder	S712T-010		1		
Universal Tight Holder	S712T-UN				1

Optional Components

Item		P/N	Quantity
USB Cable		USB-01	1
Battery Charger		S980A	1
Soft Carrying Case		SCC-01	1
Angled Stand		AGS-02	1
Working Belt		WBT-01	1
Car Cigarette Cable		CDC-04	1
Tight Holder	16 mm Cleave Length	S712T-016	1 pair
	10 mm Cleave Length	S712T-010	1 pair
	Universal	S712T-UN	1 pair
Fiber Holder	160 μm coated fiber	S712S-160	1 pair
	250 μm coated fiber	S712S-250	1 pair
	500 μm coated fiber	S712S-500	1 pair
	900 μm coated fiber	S712S-900	1 pair
Fiber Holder	Loose Tube Fiber (Left side)	S712S-LT-L	1
	Loose Tube Fiber (Right side)	S712S-LT-R	1
SOC Holder	Seiko Giken FC/SC ferrule (9mm)	S712C-SGS9-L	1
	Seiko Giken FC/SC ferrule (5mm)	S712C-SGS5-L	1
	Seiko Giken LC ferrule (9mm)	S712C-SGL9-L	1
	Seiko Giken LC ferrule (5mm)	S712C-SGL5-L	1
	Seiko Giken TOUCH Plus SC (9mm)	S712C-SGS9C-R	1
	Diamond E2000™/E3000™ ferrule	S712C-DM25-L	1
	Seiko Giken Cordage (5mm)	S712C-SGC5-R	1
	Seiko Giken Cordage (9mm)	S712C-SGC9-R	1
	Diamond Cordage (5mm)	S712C-DMC5-R	1

FURUKAWA ELECTRIC CO., LTD.

Head Office:

2-3, Marunouchi 2-chome,
Chiyoda-ku, Tokyo,
100-8322, Japan
Tel: + 81 3 3286 3227
Fax: + 81 3 3286 3978
www.furukawa.co.jp
comsales@ho.furukawa.co.jp

Europe:

Furukawa Electric Europe Ltd.
Furukawa House
77-85 Fulham Palace Road,
London W6 8JD, U.K.
Tel: + 44 (0) 20 7313 5300
Fax: + 44 (0) 20 7313 5310
www.furukawa.co.uk
splicers@furukawa.co.uk

North & South America:

OFS Fitel, LLC
2000 Northeast Expressway
Norcross, Georgia 30071, U.S.A
TOLL FREE: + 1 866 452 9516
Tel: + 1 678 783 1090
Fax: + 1 678 783 1093
www.ofsoptics.com
splicers@ofsoptics.com

China:

Furukawa Shanghai, Ltd.
Beijing Branch
Room 1108 Beijing Jing Guang
Center Huijialou Chaoyang
District Beijing 100020, China
Tel: + 86 10 8591 0608
Fax: + 86 10 8591 0609
www.furukawa-sh.cn

South East Asia:

**Furukawa Electric
Singapore Pte. Ltd.**
60 Albert Street, #13-10 OG
Albert Complex, Singapore
189969
Tel: + 65 6224 4686
Fax: + 65 6336 2635
comms@furukawa.com.sg

Export Control Regulations

The products and/or technical information presented in this publication may be subject to the application of the Foreign Exchange and Foreign Trade Act and other related laws and regulations in Japan. In addition, the Export Administration Regulations (EAR) of the United States may be applicable. In cases where exporting or reexporting the products and/or technical information presented in this publication, customers are requested to follow the necessary procedures at their own responsibility and cost. Please contact the Ministry of Economy, Trade and Industry of Japan or the Department of Commerce of the United States for details about procedures.

* Furukawa Electric reserves the right to improve, enhance, or modify the features and specifications of FITEL products without prior notification.
* Company and product names appearing in this catalogue are registered marks or trademarks of respective companies.